

## **DC Drive using PWM Techniques For Treadmill.**

<sup>1</sup>Ajit Nivrutti Shinde, <sup>2</sup>A.C. Joshi, <sup>3</sup>Sachin S. Patil <sup>4</sup>Dr. A.P. Vaidya  
<sup>1,2&3</sup>Assistant Professor, Department of Electrical Engineering, ADCET, Ashta  
<sup>4</sup>Professors, Department of Electrical Engineering, WCE, Sangli

Abstract- Manufacturing plant in industries like chemical, pharmaceutical, plastic and textile, all require motion control. And it may be a flat belt application, flow-control application or mixing of substances. Different types of motors—AC, PMDC, servo or stepper—are used depending upon the application. Of these, PMDC motors are widely used because controlling of a PMDC motor is somewhat easier than other kinds of motors. The treadmills are the walking machines used for exercise. This is a big application where a PMDC motor plays an important role in its operation. These machines are operated using PMDC motors.

In this paper, Implementation of the PIC 16F877A microcontroller for speed control of high capacity PMDC motor fed by a MOSFET has been investigated. The MOSFET is driven by high frequency PWM signal. Controlling the PWM duty cycle is equivalent to controlling the motor terminal voltage, which in turn adjust directly the motor speed. Experimental results have been obtained that show the employment of microcontroller for speed control and over current protection of a DC motor.

Key Words: *PMDC motor, PIC micro controller, Treadmill, MOSFET*

### **Introduction:**

The use of power electronics for the control of electric machines offers not only better performance caused by precise control and fast response, but also maintenance, and ease of implementation. In parallel with the advance in power electronic there have been great advances in microcontroller-based control systems due to the microcontroller flexibility and versatility. This is because all the control algorithms are implemented in the software. [1]

Adjustable speed drives may be operated over a wide range by controlling armature or field excitation. Speeds below rated by armature voltage control and above rated using field excitation variation, development of various solid state switching devices in the form of diodes, transistor and thyristor along with various analog/digital chips used in firing/controlling circuits, have made dc drives more accessible for control in innumerable areas of applications [2].

Speed Control of a small capacity drives with low voltage supply is easy. These type of drives have limitations on their operation for applications where high torque is required. The design of a high capacity variable speed drives is difficult due to thermal run away of power MOSFET if used as a switching device. The snubber circuit play important role to protect the Power MOSFET from high temperature loss. As the frequency of switching the device goes on increasing, the  $dv/dt$  &  $di/dt$  takes place across the MOSFET terminals. This makes the thermal breakdown of power MOSFET.

The Laszlo Balogh [6] has demonstrated a systematic approach to design high performance gate drive circuits for high speed switching applications. Paper consists of an overview of MOSFET technology and switching operation, design procedure for ground referenced and high side gate drive circuits in more details. By

controlling the gate charge for MOSFET during turn OFF protects the MOSFET from ringing & overshoot caused by  $dv/dt$ . John E. Makaran [3] has suggested the relationship between  $V_{GS}$  &  $V_{DS}$  to provide the two stage control of gate charge removal during MOSFET turn OFF. PMDC motor gives the best speed regulation using PI controller, as compared to other controllers, literature [4] shows the response of PI, PD & PID controller when it is connected to PMDC drive. Fuzzy logic controller using PIC 16F877A can be used for speed control of any motor only by changing control algorithm & by changing program without changing hardware [5]. Design of driver circuit is required for high power motor switching which gives smooth control of motor speed [7]. Speed control of micro PMDC motor is faster, robust, flexible and superior to when it is operated integrated fuzzy logic controller or microcontroller [8].

The objective of this paper is to explore the approach of designing a microcontroller based closed loop controller. The interface circuit and the software are all designed to achieve a better performance. The system is designed with a temperature control system to protect the motor from overheating.

## HARDWARE DESIGN

The hardware control system includes the dc shunt motor, power circuit, MOSFET driver circuit, PIC 16F877A PIC controller, speed sensor (shaft, encoder), and temperature sensor.

## BLOCK DIAGRAM

The 16F877A microcontroller implements the control algorithm by conditioning the speed and current signals and performs the speed regulation according to speed reference fed through the keypad. The

software includes a routine to read the temperature of motor and sends emergency shutdown signal to protect the dc motor from over heating,

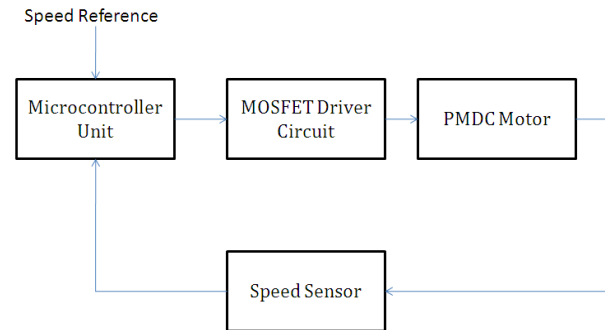


Fig 1 block diagram

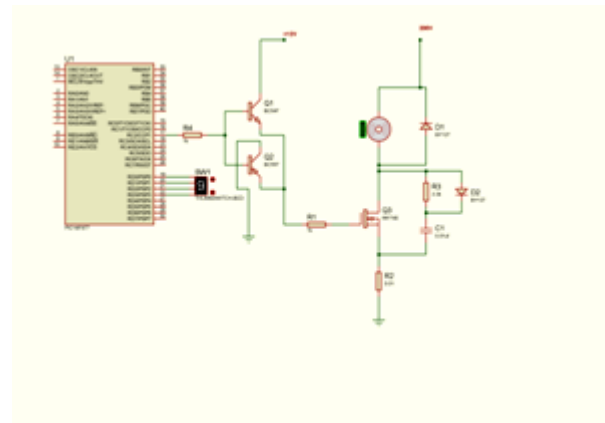


Fig 2 Circuit outline

## DESIGN OF SNUBBER CIRCUIT

When a power device is abruptly turned OFF, trapped energy in the stray inductance is dissipated in the switching device causing a voltage overshoot across the device. The magnitude of this transient voltage is proportional to the amount of stray inductance and the rate of fall or turn-off current. The situation is at its worst for fast switching MOSFET modules. These devices switch at a high magnitude of currents in a short duration of time, giving rise to potentially destructive voltage transients. The  $di/dt$  produced in the MOSFET could easily be a few thousand A/us. Proper attention needs to be paid to protect these

devices from destruction. It is determined that the snubbers offer optimized protection against voltage transients during the normal turn-on and turn-off switching. Usage of such protection circuits allows faster & safer operation by operating the device within the boundaries of the rated Safe Operating Area.

#### RCD SNUBBER CIRCUIT-

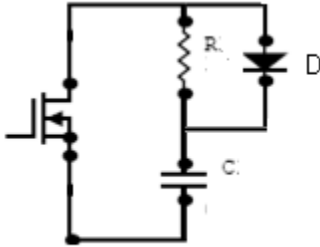


Fig 3 snubber circuit

The charge discharge snubber as shown in above figure can be used to minimize turn off dissipation in MOSFET. During MOSFET turn on the snubber capacitor is fully discharged and during turn off it is fully charged. This circuit reduces the rate of rise of voltage across MOSFET at turn off and gives softer switching and thereby reducing the losses in MOSFET.

#### SPEED MONITERING SYSTEM

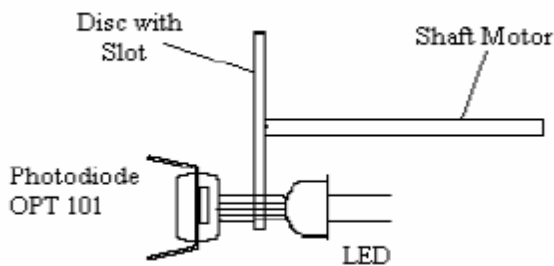


Fig 4 speed sensing

In the system, an optical encoder will be used to measure the DC motor speed. The fundamental reason for the superiority of this system is that the

optical encoder used as the velocity sensor, is capable of much better performance than the generator type of tachometer (by using back EMF). When the optical disc is properly mounted on the motor shaft, it generates a frequency directly proportional to motor speed. Changes in gap, temperature, and magnet strength simply have no effect on the output of the optical tachometer. By contrast, an analog tachometer is directly affected by all the problems listed above.

The encoder in the market is very expensive. In order to reduce the cost of the project, an optical encoder is built. Fig. below shows the schematic of the optical encoder in action respectively

The speed accuracy over fractions of a revolution depends on the quality of the optical encoder. The DC motor has an optical disc (made by cardboard) mounted on its shaft. The disc has N radial lines on its surface. In this project, we will make single slot on the disc. An LED (light emitting diode) as transmitter is put at one side of the disc and a photodiode, as receiver is fixed on the other side of the disc. Chip OPT 101 is selected as photo diode.

#### TEMPERATURE CONTROL SYSTEM

Due to continue operation of treadmills the motor winding temperature gets increases. The increase in motor temperature short circuits motor conductors. The short circuit reflects into the possibility of burning of motor. In this project temperature protection of motor is provided. IC LM 35 is used as a temperature sensor. This sensor is kept near to the motor winding. Any increase in temperature above the set value gives the signal to the relay circuit, which instantly stops the motor. Hence motor is protected from burning.

#### SOFTWARE DESIGN

The microcontroller acts like the brain of the DC motor speed control system. The microcontroller chip that has been selected for the purpose of controlling the speed of DC motor is PIC16F877A manufactured by Microchip. This chip is selected based on several reasons:

- Its size is small and equipped with sufficient output ports without having to use a decoder or multiplexer.
- Its portability and low current consumption
- It has PWM inside the chip itself which allow us to vary the duty cycle of DC motor drive.
- It is a very simple but powerful microcontroller. Users would only need to learn 35 single word instructions in order to program the chip.
- It can be programmed and reprogrammed easily (up to 10,000,000 cycles) using the universal programmer in robotics

Microcontroller will receive the desired speed from user through thumbwheel switch. The actual speed will be compared with the desired speed and the correction will be done by microcontroller to always maintain the DC motor speed at the desired speed.

### SPEED CONTROL PROGRAM FLOW

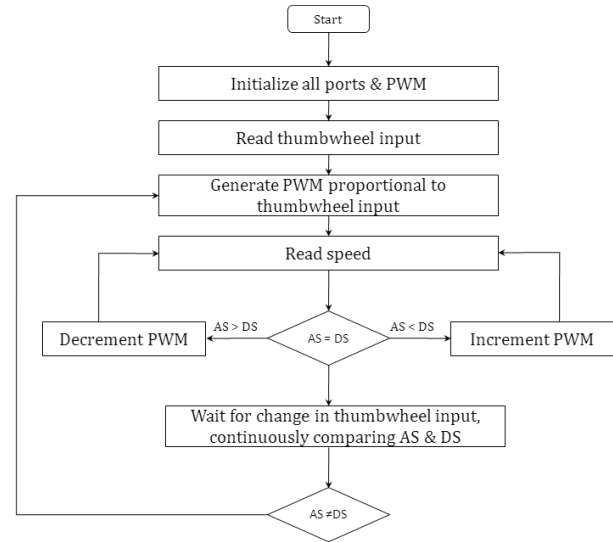


Fig 5 speed control program flow

### CONCLUSION

The above PID speed control implementation through PIC 16F877A microcontroller for a Permanent Magnet DC motor for treadmill reduces the voltage fluctuations. A smooth control is achieved over the jerky load of treadmill. The PID control improves the response time of the overall system.

### REFERENCES

- [1] T. Costabnet and J. Nicolai, "Digital Control for Brush DC Motor," IEEE Transaction on Oil Industry Application", Vol, 30, No 4, July/Alugst 1994.
- [2] A. H. M. S. Ula and J. W. Steadman, "Design and Demonstrate of a Microcontroller Control for an Industrial sized DC Motor," IEEE Transaction on Energy conversion, Vol. 3, No. 1, March 1988.
- [3] John E. Makaran, "Gate Charge Control for MOSFET Turn-OFF in PWM Motor Drives through Empirical Means," IEEE transactions on power electronics, VOL. 25, NO. 5, MAY 2010.

[4] R.Sankar and Dr.S.Ramareddy, "Closed Loop Controlled PMDC Motor Drive," International Conference on Information and Communication Technology in Electrical Sciences (ICTES 2007), Dr. M G.R. University, Chennai, Tamil Nadu, India. Dec. 20-22, 2007. pp. 329-332.

[5] Ahmet Isik, Oktay Karakaya, P. Alper oner, Mehmet Kubilay Eker, "PMDC Motor Speed Control with Fuzzy Logic Algorithm Using PIC16F877 Micro Controller and Plotting Data on Monitor,"9781-4244-3428-2/09.2009 IEEE.

[6]A literature on 'Design & application guide for high speed MOSFET Gate Drive Circuits' by Laszlo Balogh

[7] Rosnazri Ali, Ismail Daut, Soib Taib, Noor S hahida Jamoshid, Abdul Rahim Abdul Razak, "Design of High-Side MOSFET Driver Using Discrete Components for 24V Operation", The 4th International Power Engineering and Optimization Conf. (PEOCO2010), Shah Alam, Selangor, MALAYSIA: 23-24 June 2010.

[8] Radhesham G. and A.B.Kulkarni, "An Experimental Comparative Analysis of Integrated Fuzzy Logic Controller (IFLC) and PID Speed Control of PMDC Micro Motor" International Conference on Computational Intelligence and Multimedia Applications 2007

**About Author:-**

1)A.N.Shinde is working in Annasaheb Dange College of engineering and technology, ashta.He have total 9 year teaching experience. His area of interest is Feedback Control system. He has ISTE membership. He is pursuing his M.E (control system) from Walchand College of engineering sangli. He has also ISTE membership.



2)Dr. A.P. Vaidya is working in walchand college of engineering,sangli.He has total 30 year teaching experience. His area of interest is Power system analysis, Analysis and control.

3)Prof. SACHIN S. PATIL is working in Annasaheb Dange College of engineering and technology, Ashta.He has total 4 year teaching experience. He has completed his M.E. (Electronics) in shivaji university, Kolhapur. His area of interest is Digital signal processing and Communication engineering. He has published paper on "study of voice compression and decompression using ADSP".He has ISTE membership. He was Shivaji University 5<sup>th</sup> ranker in the year of may-2008



4) Prof.A.C.Joshi is working in Annasaheb Dange College of engineering and technology, ashta.He have total 6 year teaching experience. His area of interest is microprocessor and microcontroller.

