

Fault Simulation and Network Integration of substation Automation Devices to SCADA system using wireless and wired communication

Miss. Gauri Gurudas Keni,
Electrical & Electronics Department,
Goa College of Engineering
Farmagudi-Ponda
Goa-403601

Mrs. Suneeta Rayker,
Electrical & Electronics Department,
Goa College of Engineering
Farmagudi-Ponda
Goa-403601

Mr. Ganesh Pushpkumar,
R&D Department,
Siemens Ltd.
L-6, Verna Industrial Estate,
Verna-Salcete

Abstract—The purpose of this project was to simulate single line to ground fault based on substation conditions, and analyzing issues faced by end users during sending the data to the remote SCADA through RTU (Remote Terminal Unit) via wireless and wired connection.

The project was designed to simulate the single line to ground fault in a substation model and feed it to the protection device to study the factors impacting its wired and wireless communication through RTU to SCADA. This real time fault was simulated in MATLAB, then applied to the protection devices and then via RTU to SCADA system using two modes of transport (eg; wired, Wireless). SCADA (supervisory control and data acquisition) is a system operating with coded signals over communication channels so as to provide control of remote equipment.

Keywords—SCADA (Supervisory Control and Data Acquisition tool) , RTU (Remote Terminal

Unit), GPRS(General Packet radio service),GSM(Global system for mobile)

1.Introduction

Grid can be defined, as an interconnection of generation, transmission, distribution and control network. Conventional grids were not so smart in communication and there were more manual interventions, due to which delays were observed in detection and clearance of faults. Considering all these factors, Smart grids were introduced.

Smart grid is an intelligent network that communicates using digital technology and integrates the actions from different entities within the network and responds to them. The basic idea of Smart grids is to improve the reliability, efficiency and sustainability of the production and distribution of electricity.

As an effect of increasing integration of decentralized power sources and aging effect in the grid, the demand for secondary distribution automation is growing. Secondary Distribution Automation concept in smart grids wherein Ring

main units with products like Remote terminal Units (RTU) , Condition Monitors, Distribution transformers and Switch gears are involved to fasten the process of distribution.

With today's secondary distribution networks typically featuring a rather low degree of automation only, the use of advanced distribution automation concept opens large potentials for cost-effective improvements of system performance [1]. Even the automation of a smaller share of ring main units in a system can realize significant impact [1]. Explicit analyses of existing distribution networks

can identify the specific locations in the system where appropriate automation solutions can achieve the highest benefit. [1]

I. ARCHITECTURE OF THE SETUP

The distribution system can be divided into 3 levels:




Fig 1 Levels in a Substation

Remote level indicates the Master Control centre which includes Master SCADA, station level micro SCADA and Bay level (RMU (Ring Main Unit), Meters, Relays, CT, Circuit Breakers).

In this project the we will be considering the automation between bay and station level. The single line to ground fault is injected at bay level and observed at station level. The issues during configuration and sending the data from the devices

to SCADA via wired and wireless communication are highlighted.

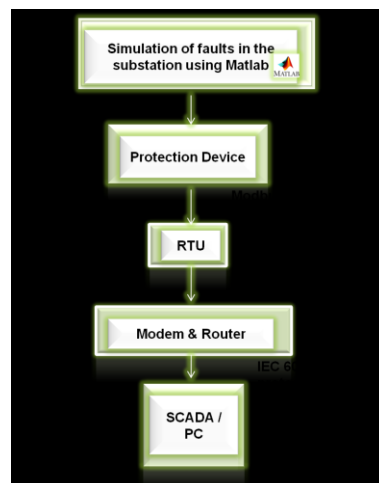


Fig 2 Architecture of the setup

A. Simulation of Faults in Matlab

An abnormal condition occurring on the transmission line that deviates the current and voltage from its normal value is known as a fault. Electrical faults are basically of two types : Symmetrical and unsymmetrical. Symmetrical faults are 3 phase faults while asymmetrical are Single line to ground, Double line to ground and line to line fault.

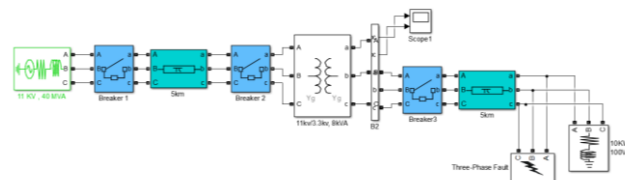


Fig 3: Simulation Model of Faults

The simulation model is designed to indicate an over current fault to show the behavior of Single line to ground fault(Ref Fig3). It consists of two breakers on the primary of the transformer and one

on the secondary side. The fault is injected at the load side and the observations are as shown in Fig 4, 5 and 6.

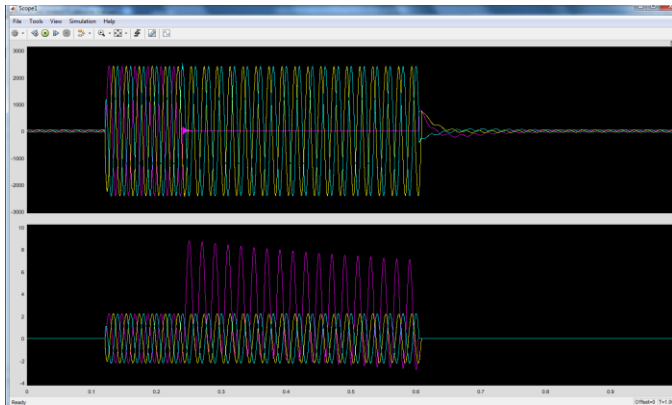


Fig 4: Voltage and Current Waveform for Single Line to ground Fault

The circuit breaker is closed at 0.12s and the fault is injected at 0.24s. From 0.12s till 0.24s the voltages are found normal however after 0.24s the voltage of phase A drops down to 0 and the current shoots up to 300-400A. The fault is cleared and breaker is opened at 0.6s.

These faults are injected to protection device (condition monitoring device) by converting Matlab files to COMTRADE (Common Format for Transient Data Exchange) format.

- **Data (.dat) file**—Mandatory binary or ASCII text file. A data file contains a time-stamped numerical value for each input channel for each sample in the record. Values can be zero-based or have a zero offset.

- **Configuration (.cfg) file**—Mandatory ASCII text file. A configuration file contains information to interpret the data file such as the sampling rates, number of channels, line frequency, and channel information. A configuration file also specifies whether the data file is in ASCII or binary format.

B. Equations

Source: 11KV

Transformer: 11KV/3.3KV, 14 KVA

Load: 10KW, 100VAR

The KVA rating was calculated using equation (1) .

$$KVA = (1.732 * V * I) / 1000 \quad (1)$$

C. Some Common Mistakes

- In Matlab Simulation, the VI Measurement block should be placed at the beginning of the fault block.
- The power GUI block should be inserted with the right sampling time and solver type should be selected.

II. INTEGRATION OF PROTECTION DEVICES TO SCADA

The set up consists of an integration of condition monitor and RTU to SCADA using GPRS modem and M2M gateway. A remote terminal unit (RTU) is a micro processor controlled electronic device that interfaces objects in the physical world to a Distributed control system or SCADA system by

transmitting telemetry data to a master system, and by using messages from the master supervisory system to control connected objects. An RTU monitors the field digital and analog parameters and transmits data to the Central Monitoring Station. It contains setup software to connect data input streams to data output streams, define communication protocols, and troubleshoot installation problems [6]. An RTU may be interfaced to multiple master stations and IEDs (Intelligent Electronic Device) with different communication media (usually serial or Ethernet).

A. Communication protocols

The MODBUS protocol follows a client/server (master/slave) architecture where a client will request data from the server. The client can also ask the server to perform some action. The client initiates a process by sending a function code that represents the type of transaction to perform. The transaction performed by the MODBUS protocol defines the process a controller uses to request access to another device, how it will respond to requests from other devices, and how errors will be detected and reported. The MODBUS protocol establishes a common format for the layout and contents of message fields. Controllers communicate using a master/slave technique where only one device, the master, can initiate transactions or queries. The other devices, slaves, respond by supplying the requested data to the master or by taking the action requested in the query.

The messages exchanged between the client and the server is called frames. There are two types of MODBUS frames: Protocol Data Unit (PDU) and Application Data Unit (ADU). The PDU frames contain a function code followed by data. The function code represents the action to perform and the data represents the information to be used for this action. ADU frames add a little more complexity with an additional address part. ADU frames also provide some error checking. Both the ADU and PDU frames follow Big-Endian encoding.

MODBUS transactions always perform a set of actions by reading or writing to a set of four data types. Table 1 describes the four data formats used by the MODBUS application layer

The Discrete Inputs represent a single bit (Boolean) which can only be read. In other words, the client can only perform a read action on the discrete inputs. The same holds for the Input Registers. The client can only read the server's Input Registers. The difference between the Discrete Inputs and the Input Registers is that the Input Registers represent 16 bits while the Discrete Inputs are only a single bit. The Coils also represent a Boolean data type which can be read and written from the client. The Holding Registers represent a 16 bit word that can be read and written to.

IEC 60870-5-104 (also known as IEC 870-5-104) is an international standard, released in 2000 by the IEC(International Electrotechnical Commission).. The biggest advantage of IEC 60870-5-104 is that it enables communication via a standard network,

which allows simultaneous data transmission between several devices and services.

B. SCADA Configuration with RTU using wireless communication

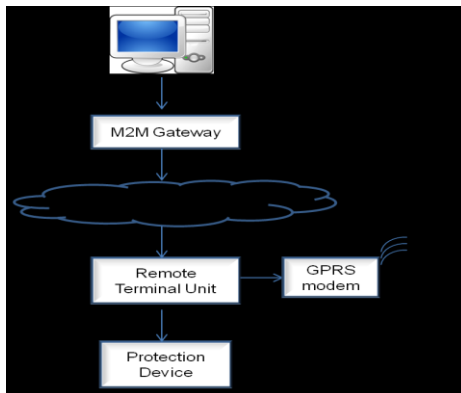


Fig 7: RTU, SCADA Integration using wireless communication

In this setup, RTU communicates with the protection device using Modbus communication protocol at the data layer. As Modbus supports master –slave communication there is continuous polling of data. At the higher level i.e. Network layer, IEC 60870 104 enables communication between control station (SCADA) and substation (RTU) via a standard TCP/IP network. The communication between the substation and the Control station is wireless through GPRS. GPRS architecture works on the same procedure like GSM network, but, has additional entities that allow packet data transmission. This data network overlaps a second-generation GSM network providing packet data transport at the rates from 9.6 to 171 kbps. Along with the packet data transport

the GSM network accommodates multiple users to share the same air interface resources concurrently.

Following are the characteristics of GPRS:

- transmission modes: send and receive data in packet transfer mode; cost effective and efficient use of network resources
- traffic characteristics: intermittent, bursty data transmissions; frequent transmissions of small volumes of data; infrequent transmission of large volumes of data
- transmission: four level of radio priorities and five classes of QoS supported; point-to-point (PTP) or point-to-multipoint (PTM)

C. SCADA Configuration with FRTU using wired communication




Fig 8: RTU SCADA Integration using wired Communication

In this setup RTU communicates with the protection device using Modbus communication protocol at the data layer. As Modbus supports master –slave communication there is continuous polling of data. At the higher level i.e. Network layer, IEC 60870 104 enables communication between control station(SCADA) and substation(RTU) via a

standard TCP/IP network. The communication between the substation and the Control station is wired. The data throughput was observed to be 60Kbps.

D. CONCLUSION

The fault indication from the protection device to SCADA was observed. Along with the fault indications voltages and currents were also monitored on SCADA in both the cases wired and wireless communication. There are various factors that impact the wired and wireless communication. Cost Reduction is an important factor in wireless communication using GPRS. In this set up the cost is dependent on the data packets of the communication sent and not on the connection time. Also the advantage of authentication is available to secure the connection. In case of bad weather the connections are lost frequently, however due to the capability of 104 protocol of connection retries, the connection can be regained in less time. However there are factors that affect the wireless communications. The delay in the data transfer is observed in case of wireless (due to the time required to communicate from GPRS modem to the

M2M Gateway). Positioning of the Antenna and obstacles in the signal path (buildings, walls) are the other factors impacting the performance of wireless communication. Wired communications are often faster and have better throughput compared to wireless. It is more secured and reliable however the setup cost and time required is more. As per the analysis done, it is found that the communication done using wired and wireless system has its own advantages and disadvantages. It would depend on the requirement of the customer to choose the right technology as the data transmitted is very crucial for smooth supply of electricity.

References

- [1] *DISTRIBUTION AUTOMATION SOLUTIONS – IMPACT ON SYSTEM AVAILABILITY IN DISTRIBUTION NETWORKS*, 21 st International Conference on Electricity Distribution, Oliver SCHROEDEL ,Siemens AG – Germany oliver.schroedel@siemens.com, Michael SCHWAN Siemens AG – Germany michael.schwan@siemens.com, Sven KOEPPE Siemens AG – Germany sven.koeppe@siemens.com, Robert ROSENBERGER
- [2] www.siemens.com/energy-automation
www.siemens.com/smart-grid
- [3] General Packet Radio Service (GPRS): architecture, interfaces, deployment by Yi-Bing Lin* ; † Herman C.-H. Rao, Imrich Chlāmtac